



## 2005 DOE Hydrogen Program Review



# Metal-doped Carbon Aerogels for Hydrogen Storage

Joe H. Satcher, Jr., Theodore F. Baumann, Julie L.  
Herberg, Robert S. Maxwell

*Lawrence Livermore National Laboratory*

05/24/05

Project ID# STP-31

DOE Center of Excellence on Carbon-based H<sub>2</sub> Storage Materials

This presentation does not contain any proprietary or confidential information

*Work was performed under the auspices of the U.S. Department of Energy by  
Lawrence Livermore National Laboratory under Contract W-7405-ENG-48*



# Overview of Project

## Timeline

- Project start: FY05
- Project end date: FY07
- Percent complete: New Start

## Budget

- Total project funding (proposed): \$1050K
- Funding for FY05: \$240K

## Technical Barriers Addressed by Project

- B. Weight and Volume
- C. Efficiency
- M. Hydrogen Capacity and Reversibility
- N. Lack of Understanding of Hydrogen Physisorption and Chemisorption

## Partners

- NREL (Heben/Dillon)
  - H<sub>2</sub> uptake/release measurements
- UNC-Chapel Hill (Prof. Wu)
  - Advanced NMR analysis
- Oak Ridge (Gregory)
  - NMR analysis of materials
- MIT (Prof. Dresselhaus)
  - Materials Characterization



# Project Objectives

- To develop new nanostructured carbon materials that meet the targets set by DOE for hydrogen storage:
  - Novel metal-doped carbon aerogels (MDCAAs) will be prepared, characterized and evaluated for their hydrogen storage properties
  - Mechanisms associated with hydrogen physisorption and chemisorption in these carbon-based materials will be investigated using advanced nuclear magnetic resonance (NMR) techniques
- Insights gained from MDCA systems should also be beneficial to the other nanostructured carbon systems, leading to the design of an optimized carbon-based material for hydrogen storage



# Technical Approach

- Metal-doped CAs possess desirable structural features for the investigation of hydrogen uptake and release:

## Graphitic Nanostructures


Nanoporosity

Curved surfaces for increased adsorption potential

Metal Nanoparticles

$d = 5 \text{ to } 60 \text{ nm}$

Catalyze the formation of graphitic structures

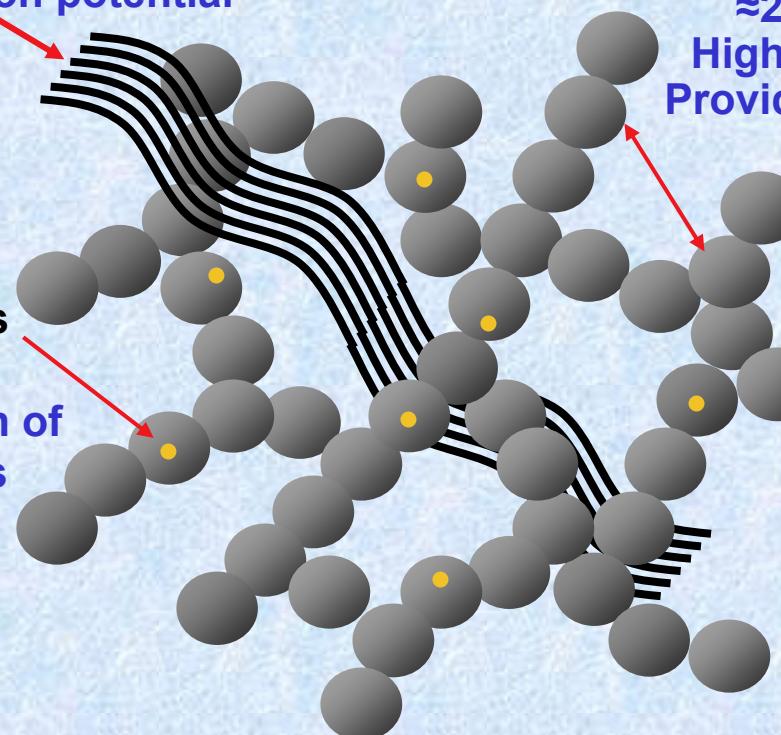

Mesoporosity

$\approx 2 \leq d \leq \approx 50 \text{ nm}$

High Surface Areas  
Provides accessibility

Primary carbon particles

$d = 2 \text{ to } 20 \text{ nm}$


Amorphous or Graphitic?  
Contain microporosity

Metal-doped CAs can be readily prepared in bulk quantities (gram scale)



# Background on Carbon Aerogels

- Novel mesoporous materials:
  - Low mass densities ( $0.5\text{-}0.01 \text{ g/cm}^3$ )
  - High surface areas ( $400\text{-}1000 \text{ m}^2/\text{g}$ )
  - Ultrafine cell/pore sizes
  - Continuous porosities
- Prepared using sol-gel chemistry:

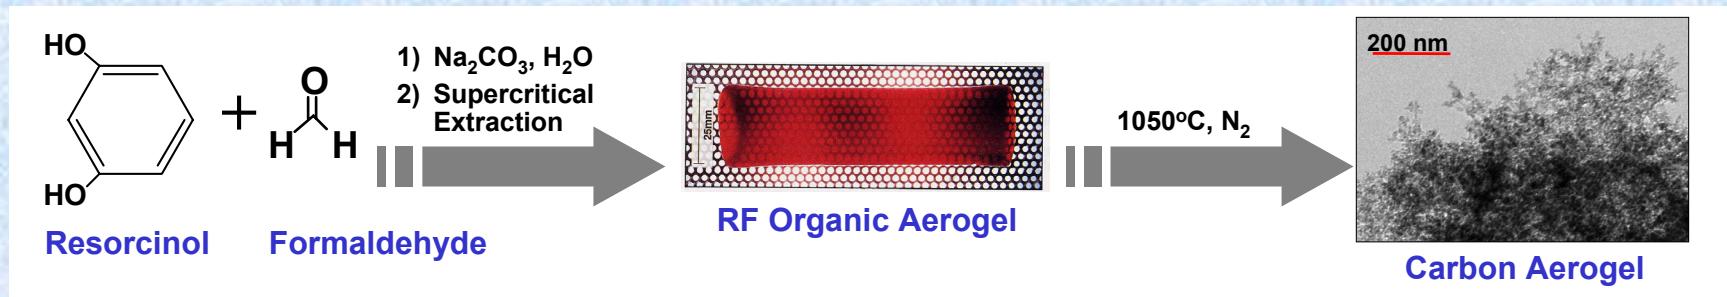

- **$\text{H}_2$  storage properties of undoped CAs have been investigated:**
- **Flexibility of organic sol-gel chemistry can be exploited to improve  $\text{H}_2$  storage capacity in carbon aerogels**

Aerogel	Density ( $\text{g/cm}^3$ )	$\text{H}_2$ (wt%)	$\text{H}_2$ ( $\text{kg/m}^3$ )
RF	0.106	16.7	21.3*
RF	0.411	4.4	19.3
CA	0.149	5.8	9.3
CA	0.637	3.2	21.0

Measurements were performed at 77 K, \*1000 psi  
(Pekala et al. 1995, UCRL-JC-120315)

# Current Technical Status

## FY05 Accomplishments:

### 1. Preparation of MDCAs:

- Different metals: Co, Ni, Fe (~8-10 wt% M-loading)
- Different densities: 200 mg/cc, 400 mg/cc
- Different carbonization temperatures: 800°C, 1050°C


### 2. Structural characterization:

- SEM, TEM, XPS, and XRD (Collaboration with Dresselhaus Group at MIT)
- Examining carbon structure in MDCAs using solid state  $^{13}\text{C}$  NMR techniques
- Currently using  $^{129}\text{Xe}$  NMR experiments to probe textural porosity (LLNL/PNNL Collaboration: *J. Am. Chem. Soc.* 2004, 126, 5052)




# Current Technical Status

- Incorporation of metal species into aerogel framework using sol-gel precursors containing ion exchange sites :
  - General technique that can be used to incorporate a variety of metals

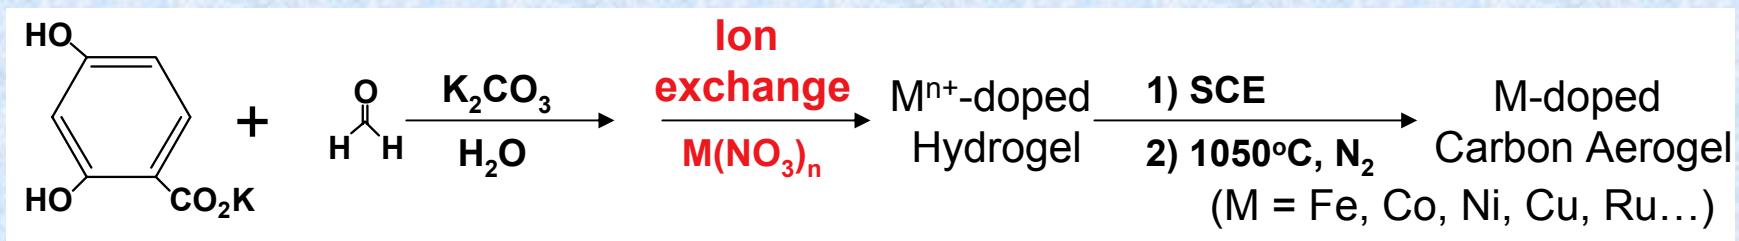

- Physical Properties:
  - Density Ranges: 150-400 mg/cm<sup>3</sup>
  - Surface Areas: 500-900 m<sup>2</sup>/g
  - Metal Content: 1-10% by weight
- Metal nanoparticles form during carbonization (5 to 60 nm)

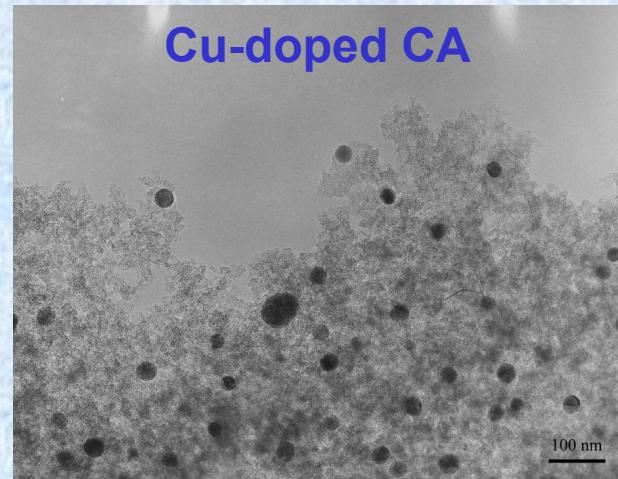


Satcher, J. H.; Baumann, T. F., US Patent 6 613 809, 2003.

Baumann, T. F. et al *Langmuir*, 2002, 18, 7073; *Langmuir*, 2002, 18, 10100; *J. Non-Cryst. Solids* 2003, 317, 247 *J. Non-Cryst. Solids*, 2003, 318, 223.




# Current Technical Status

- Formation of graphitic nanostructures in our MDCAs ( $M = Co, Ni, Fe$ ) observed at relatively low carbonization temperatures
  - XPS data show metal nanoparticles coated with graphitic carbon
  - Potential substrates for the growth of carbon nanotubes

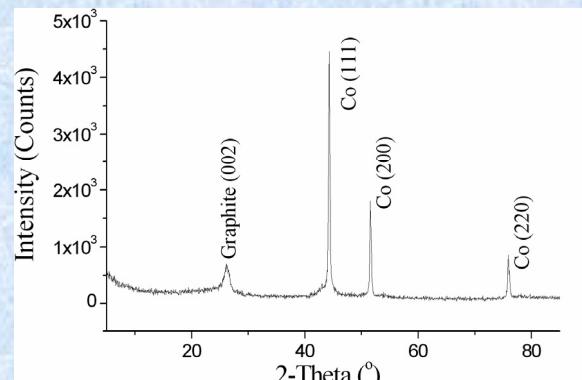

Co-doped CA ( $T_c = 1050^\circ C$ )

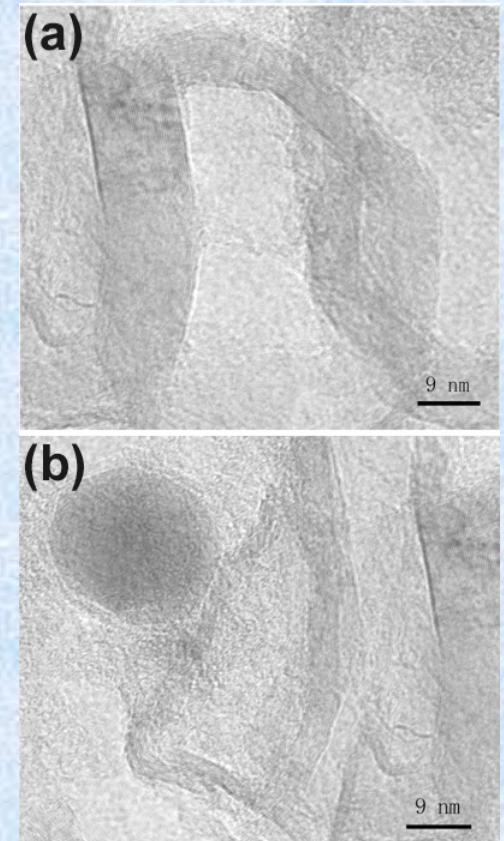



# LLNL Sol-Gel Synthesis Facilities

- **Laboratory Space:**

5 Labs totaling ~3000 ft<sup>2</sup>

- **Equipment:**

2 Rapid Super Critical Extractors

20L High Temperature Extractor

16L CO<sub>2</sub> Extractor

10 Polaron CO<sub>2</sub> Extractors

5 Lindberg Tube Furnaces


Programmable Sintering Furnaces

High Temp Vacuum Furnace

Clean Room

Quench Furnace

Glove Box

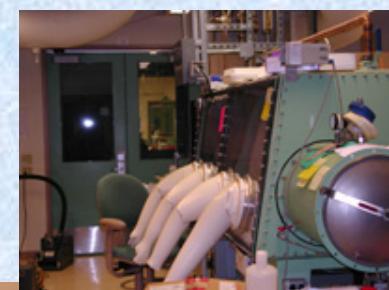

# Current Technical Status

- Solid state NMR techniques will be used to:
  - Determine the nature of metal-carbon, carbon-hydrogen and metal-hydrogen interactions utilizing *in-situ*  $^1\text{H}$ ,  $^2\text{H}$ ,  $^1\text{H}-^{13}\text{C}$  and  $^1\text{H}-\text{M}$  (where M =  $^{59}\text{Co}$ ,  $^{61}\text{Ni}$ ,  $^{57}\text{Fe}$ ,  $^{11}\text{B}$  and  $^{27}\text{Al}$ ) NMR
  - Determine the mode of hydrogen interaction with the MDCAs
- These experiments will allow us to assess the most favorable combinations of carbon-metal-hydrogen and relevant structural motifs for optimal hydrogen storage
- We are currently using NMR methods to examine the structure and dynamics of  $\text{H}_2$  storage in alanate systems (collaboration with SNL)



# LLNL NMR Facilities



- LLNL has state of the art NMR facilities that compliment those at UNC:

- Multiple field strengths (20, 42, 82, 300, 400, 500, 600 MHz)
- Full suite of solids and liquid state NMR probes
- Field gradients for diffusion and imaging experiments
- OP  $^{129}\text{Xe}$  capabilities
- Cryostats capable of reaching 4K and transmission line probes for observation of in-situ  $\text{H}_2$  adsorption
- Extensive experience in the characterization of disordered materials, double resonance SEDOR experiments, and dynamics



# Future Work

- Evaluate H<sub>2</sub> storage properties for MDCAs:
  - Currently constructing apparatus for volumetric H<sub>2</sub> measurements
- Initiate mechanistic studies using advanced NMR techniques
- Milestones:
  - 1) Down-select number of MDCAs examined
  - 2) Optimize H<sub>2</sub> storage capacities for most promising candidates through modification of:
    - Metal species (type, doping level)
    - Carbonization temperature (degree of graphitization)
    - Particle size (surface area,pore size distribution)
    - Density (weight, strength)

## FY06 efforts:

- Determining reversibility and lifetime in these materials over multiple charge/discharge cycles
- Continue mechanistic studies using advanced NMR techniques



# Project Timeline

Task	FY05	FY06	FY07
<b>Materials</b> Synthesis of MDCAs Structural characterization Refine Synthesis		Down selection of MCDAs	
<b>H<sub>2</sub> Measurements</b> Volumetric measurements Reversibility/lifetime			Go/No Go on MDCAs
<b>NMR Characterization</b> Carbon structure Mechanistic studies Other Center Materials			

# Overlap with Center Members

- **Interaction with National Renewable Energy Laboratory (Heben/Dillon) for H<sub>2</sub> adsorption/desorption measurements:**
  - Measure H<sub>2</sub> uptake/release for the MDCA samples
  - Performed initial TPD studies on our “baseline” un-doped CA materials
- **Complement NMR work at UNC-Chapel Hill (Prof. Y. Wu) in the analysis of H<sub>2</sub> uptake and release in carbon-based materials**
  - Evaluate mechanisms of interaction using NMR techniques
  - Unique capabilities at LLNL’s NMR Center
  - Discussions with groups at Oak Ridge (Dr. Gregory) and CalTech (Prof. Ahn) regarding NMR analysis of carbon-based materials
- **Opportunities for developing computational effort**
  - Models for growth of metal particles and graphitic nanostructures
  - Graphitic overcoat on metal nanocrystals
  - H<sub>2</sub> interaction with MDCAs



# Hydrogen Safety for Effort

- The most significant hydrogen hazard associated with this project:
  - The use of compressed hydrogen gas in the evaluation of the MDCA materials
  - Volumetric hydrogen measurements will require the use of hydrogen gas in a pressure manifold
  - The NMR experiments will involve pressurizing quartz NMR tubes with hydrogen gas

# Hydrogen Safety for Effort

- Our approach to deal with this hazard:
  - We have an integrated safety management (ISM) plan in place at LLNL for the use of hydrogen gas:
    - Personnel will have training in handling pressurized gases
    - The equipment will be tested by certified personnel to verify that all parts conform to ASME pressure standards
  - The experiments (both volumetric and NMR) will require small volumes of hydrogen gas, limiting the risk associated with this work